



EVC1.5 HC BW

VERTICAL COOLER

ESTABLISHING A **NEW STANDARD** IN THE FOODSERVICE INDUSTRY.

Energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, and the lowest utility costs in its category.



KEY FEATURES



- **Eco-Friendly Refrigerant**
Environmentally friendly hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA & California refrigerant & energy standards.



- **Electronic Temperature Controller**
Patented ETC1H electronic controller assures optimal refrigeration performance through precision temperature control, and intelligent control for defrost cycle, compressor & other component functions.




- **Standard LED Lighting System**
Ultra bright low energy interior LED illumination system provides optimal merchandise display visibility. Low profile, door mounted, clip-in LED design.




ESTABLISHING A **NEW STANDARD** IN THE FOODSERVICE INDUSTRY.

PRODUCT VIEWS


TOP VIEW



FRONT VIEW

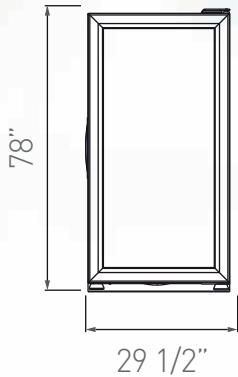

SIDE VIEW

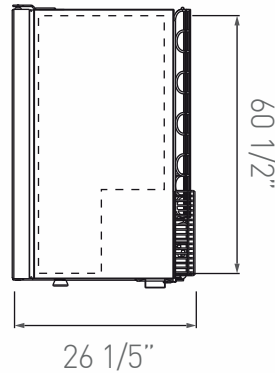

TECHNICAL SPECIFICATIONS

Exterior Dimensions

H:	27 4/5"	71 cm
W:	14"	36 cm
D:	18 4/5"	48 cm

Interior Dimensions

H:	23 3/5"	60 cm
W:	11"	28 cm
D:	12 3/10"	31 cm

Usable Interior Capacity

H:	23 1/5"	59 cm
W:	9 2/5"	24 cm
D:	10 4/5"	27 cm

Usable Volume

1.36 ft ³
38.64 lts

Doors	Door construction	Shelves	Shelves Size
1	V7 Plastic frame	3	W: 9 9/10" 25 cm D: 11" 28 cm

External Material Pre-painted steel

Internal Material Pre-painted steel

REFRIGERATION PERFORMANCE DATA

Refrigerant	Energy Consumption	
R600a 1.23 Oz (0.035 kg)	3.123 kWh/24h	
Compressor Power	Condenser	
1/12 HP	Static	
Thermostat setting default	Cut-Out	Cut-In
	32°F [0°C]	44.6°F [7°C]

ELECTRICAL DATA

Power supply	AMPS	Lighting
115V/60 Hz	1.1 A	250 Lux Output 2 modules 12 total LED's
Plug Type	Controller	Cord length
NEMA 5-15P	ETC1H	128" [327 cm]

LOGISTIC DATA

Trailer Loads	Unit weight with packaging	Dimensions w/packaging
53': 284	74.3 lb 33.70 kg	H: 33 3/10" 85 cm W: 17 2/5" 44 cm D: 23 7/10" 60 cm
	65.26 lb 29.60 kg	

Customer service and warranty

Three year limited warranty, includes parts and labor.

An additional two year warranty is issued on the compressor (USA & Canada only).

Operators must follow installation and operational guidelines per Imbera Users Manual.

Each cooler must be connected directly to a single power supply, otherwise warranty will be voided.

Customer service: 866.548.5770

*Energy consumption based on ANSI/ASHRAE Standard 72-2005

*PA System (Active walls)

*Dimensions rounded up to the nearest inch or centimeter

*Specifications subject to change without notice

*H: Height, W: Width, D: Depth

07/09/2021