

G319 BB PICO SMART COOLER

ESTABLISHING A NEW STANDARD IN THE FOODSERVICE INDUSTRY.

Energy efficient, eco-friendly HC refrigerant with low charge, spark-free components, and the lowest utility costs in its category.





IMBERA | 1925 Shiloh Road, Building #2 Kennesaw, GA 30144 USA P: 678.504.6835 | <u>us.imberacooling.com</u>



PICO COOLER

The smallest but most versatile 365 Retail Markets technology, that provides an opportunity to grow markets into semi-public areas, though controlled access to your coolers, reducing theft and can be placed almost anywhere.

INSIGHT HEALTH LOCK

NAMA certified health lock system, with integrated Bluetooth communication: App allows operators to lock & unlock on location via Bluetooth.

Latest version of electronical SouthCo lock, upgraded with the door close sensor located inside the striker.

ECO-FRIENDLY REFRIGERANT

Environmentally friendly hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA and California refrigerant and energy standards.

HIGH POWER RELIABLE REFRIGERATION SYSTEM

Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining colder temperatures for food preservation

NEWLY DESIGNED CONDENSER

New condenser featuring a joints reduction down to zero increasing long term refrigeration reliability and safeguarding against any system leaks.

STANDARD LED LIGHTING SYSTEM

Ultra bright low energy interior LED illumination system provides optimal merchandise display visibility. Low profile, door mounted, clip-in LED design.


SPARK-FREE REFRIGERATION COMPONENTS


All reach-in models have spark free refrigeration components for optimal safety, per UL requirements .



G319 BB PICO **SMART COOLER**

ESTABLISHING A NEW STANDARD IN THE FOODSERVICE INDUSTRY.

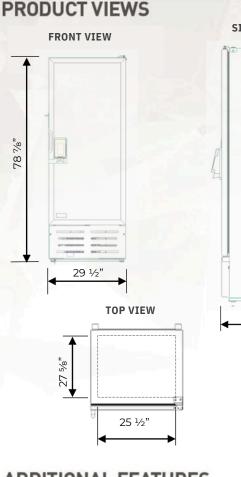



ADDITIONAL FEATURES



> New Plastic Payment System Holder available at the end of 2024

> Metal Payment System Holder



> Gravity feed, sandwich trays and extra shelves



> Casters available



> Price Kit - Available for shelf display

Customer service and warranty

Three-year limited warranty, includes parts and labor. An additional two-year warranty, instacts gued on the compressor (USA & Canada only). Operators must follow installation and operational guidelines per Imbera User's Manual. Each cooler must be connected directly to a single power supply, otherwise warranty will be voided. Customer service: 866.548.5770

Exterio	r Dimensions	Interior Dimensions			
H: W: D:	78 %" 201 cm 29 ½" 75 cm 30 ½" 77 cm	H: 60 ¾" 154 cm W: 25 ½" 65 cm D: 27 ½" 55 cm			
Usable	Interior Capacity	Usable Volume			
H: 52 10" 134 cm W: 24 10" 62 cm D: 19 10" 48 cm		19.9 ft ³ (546.23 lts)			
oors	Door Construction	n Shelves Shelves size			
1	Plastic Frame	W: 24 % (63 cm) D: 19 % (50 cm)			
xterna	l + Internal Materia	Prepainted steel			
) REFF	RIGERATION PER	FORMANCE DATA			

Retrigerant	Energy Col	isumption		
R290 1.9 oz (0.055 kg)	1.820 kwh / 24 h			
Compressor Power	Condenser			
1/4 HP	Finless [low maintenance]			
Default Thermostat Catting	Cut-Out	Cut-In		
Default Thermostat Setting	32°F (0°C)	44.6°F (7°C)		

O ELECTRICAL DATA

Power Supply 115V / 60 Hz	AMPS 7.0	Lighting 300 Lux Output 3 modules 32 LED's per module	
Plug Type ()	Controller	Cord Length	
NEMA 5-15P	CIR RS232	118" (300 cm)	

PACK-OUT CAPACITY**

Â		Facings		Deep		Total Capacity
20 oz	5 Shelves	8	х	6	=	240**

OLOGISTIC DATA

Trailer Loads	Packaged L	Jnit Weight	Packaged Dimensions		
53': 60	240.5 lb	(109 kg)	H: 82 ¼" W: 32 ½" D: 32 ½"	209 cm 82 cm 83 cm	

*Energy consumption based on ANSI/ASHRAE Standard 72-2005. *Dimensions rounded up to the nearest inch or centimeter. *Specifications subject to change without notice. *H: Height, W: Width, D: Depth